(x)

4'

8'-

4

-Ç

-12<u>"</u>-

NEW CONSTRUCTION OR RE-ROOF/TEAR OFF PROJECTS WITH SECUROCK, DENS-DECK, HP RECOVERY BROAD OR ANY CARLISLE APPROVED INSULATION MIN 1-1/2" (40mm) THICK 12"

 (\times)

36"

36"

12"

12"

24"


12"

-12<mark>"</mark>-

 \otimes

24"

RE-ROOF/NO TEAR OFF PROJECTS WITH POLYISOCYANURATE LESS THAN 1-1/2" (40mm) THICK

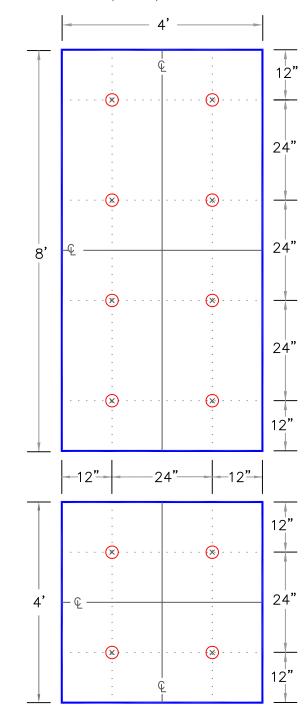

NOTES:

4'

- 1. FOR CRITERIA ON INSULATION FASTENERS AND PLATES, REFER TO CARLISLE SPECIFICATIONS.
- 25 AND 30-YEAR WARRANTY PROJECTS REQUIRE COMPLETE TEAR OFF.

FEET TO CENTIIMETERS			INCHES TO CENTIMETERS																			
4'	8'	inch	1/8"	1/4"	15/32"	1/2"	5/8"	3/4"	1"	1.5"	2"	2.5"	3"	4"	6"	8"	9"	11"	12"	18"	24"	36"
120	250	cm	0.5	1	1.2	1.5	1.6	2	2.5	4	5	6.5	7.5	10	15	20	23	28	30	46	61	91
FASTENER & PLATE INSULATION/COVER BOARD DETAIL NO.														0.								

ATTACHMENT FOR PROJECTS CENTER LINE EXCEEDING 15-YEAR WARRANTIES → GUIDE LINE For additional information, refer to Specifications → FOAM ADHESIVE MECHANICALLY FASTENED